

# Intelligent Auxiliary Battery Control - A Connected Approach

**Author, co-author (Do NOT enter this information. It will be pulled from participant tab in MyTechZone)**

**Affiliation (Do NOT enter this information. It will be pulled from participant tab in MyTechZone)**

## Abstract

As vehicles are getting electrified and more intelligent, the energy consumption of the auxiliary system increases rapidly. The auxiliary battery acts as the backbone of the system to support the proper operation of the vehicle. It is important to ensure the auxiliary battery has enough energy to meet the basic load regardless the vehicle is in park or running. However, the existing methods only focus on auxiliary energy management strategies when the vehicle is in a dynamic event. To fulfill the gas, we propose an intelligent strategy that detects the low state of charge (SOC) condition, temporarily turns down the auxiliary loads based on their priorities and charges the auxiliary battery at the maximum efficiency of the auxiliary power unit. In addition, the proposed strategy allows the vehicle to get the park duration update and make intelligent decisions on charging the auxiliary battery. Simulation results indicate that our method closes the technology gap that associated with the existing methods. As a result, the energy consumption remains low while the SOC of the auxiliary battery is sustained.

## Introduction

There is no doubt that electrification is the primary means to achieve both energy consumption and emission reduction. Unlike the energy management strategy for hybrid propulsion systems that has been studied in a tremendous number of literatures, the energy management strategy for the auxiliary battery hasn't drawn enough attention. The main purpose of the auxiliary battery is to support the safe operation of the auxiliary system. As the electrification revolution continues, more and more electronic devices that rely on the power from the auxiliary battery have been put in electrified vehicles to make them smarter and more powerful. With the increasing number of electronic devices to support connectivity and autonomous driving capability, the energy consumption on the auxiliary system is rising dramatically and foreseen to become more severe in the future.

To maintain the state of charge (SOC) of the auxiliary battery, the alternator is often used to convert mechanical energy from the engine crankshaft via a serpentine belt into electrical energy in the conventional vehicle. The alternator consists of a stator, a rotor, several diodes, a voltage regulator, and a cooling fan. The alternative current (AC) from the stator and the rotor is transformed into a direct

current (DC) to charge the auxiliary battery. The voltage regulator regulates the voltage. The cooling fan dissipates heat from the alternator and protects the alternator from overheating. However, the alternator is replaced by a DC-to-DC converter in the hybrid electric vehicle (HEV) and the electric vehicle. The DC-to-DC converter transfers energy from the high voltage system to the auxiliary system. For simplicity, we use auxiliary power unit (APU) to describe the DC-to-DC converter in this paper.

Like the alternator in the conventional vehicle, the APU also needs to be controlled to maintain the SOC of the auxiliary battery. The strategy that is used to decide how much and how fast energy flows from the HV system to the auxiliary battery via the APU is called APU energy management strategy. A group of researchers studies the APU energy management strategy in a fuel cell vehicle [1]. Three use cases such as load without the APU, load with the APU and load with a supercapacitor are investigated in their study. However, their strategy falls short in oversimplifying the APU operation.

A different group of researchers propose a fuzzy-based strategy for APUs in [2]. The fuzzy logic approach is chosen because they believe there is no simple model for estimating battery SOC and electrochemistry-based modeling is heavily dependent on knowledge of the battery internal parameters. In addition, they claim their strategy works for both batteries and supercapacitors. The battery SOC and the normalized APU current are used as the input and output of the fuzzy controller, respectively. The charge current is maintained in the best efficiency region most of the time.

A dual battery system with a Cuk converter used as the APU is proposed to fast charge electric vehicles in [3]. This battery system consists of a main battery with high energy density and an auxiliary battery with low energy density. The auxiliary battery is used to reduce fast charging stresses on the main battery. Three different charging scenarios are studied. The first scenario has power flow into both batteries. Only the auxiliary battery provides power to charge the main battery and meets the operation requirement for the rest of the system in the second scenario. The last scenario has the main battery provide power to the system. Although this work exploits having two batteries to address fast charging stresses, it does not make any improvements in energy consumption reduction.

A decentralized energy management strategy is proposed to reduce energy consumption in [4]. More specifically, this strategy aims to force an increased statistical correlation between the applied auxiliary loads and vehicle dynamics. What unique in their strategy is the use of an Eco-Mode. If the sum of traction current and auxiliary current is less than the charge limit and the SOC is greater than the SOC

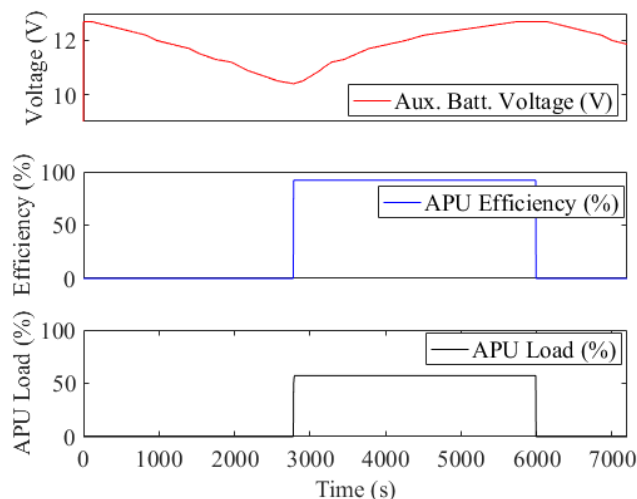


Figure 13. Auxiliary battery voltage, APU efficiency and Load.

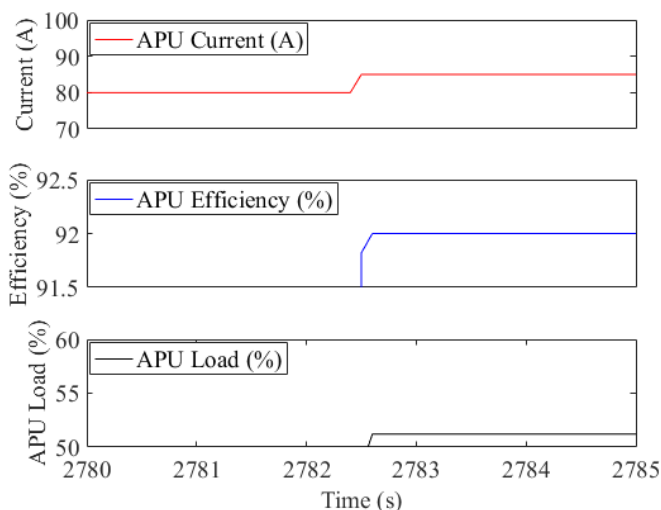


Figure 14. Efficiency adjustment.

The auxiliary battery voltage, APU efficiency and percent load are shown in Figure 13. Unlike Figure 9, the APU turns off once the SOC of the auxiliary battery reaches 95%. This difference is due to the current provided by the APU is greater than the maximum load in the use case. The proposed strategy also successfully adjusts the operating point to achieve the maximum efficiency in the key-off use case.

## Conclusions

With more offering of drive assist functionality by vehicle manufacturers, there is increasing pressure on auxiliary battery to improve its efficiency and implement energy management strategy to maintain state of charge (SOC) during vehicle operations. In this work authors have proposed a strategy to diagnose low SOC condition, prioritize auxiliary loads if needed and effectively manage charging of 12V battery by operating APU at high operating efficiency level during key-on and key-off event. The results confirm that the low SOC condition is detected, auxiliary loads are prioritized and APU adjust operating points to work at high efficiency to ensure energy transfer from HV to LV during key-on and key-off vehicle use case.

## References

1. Kabisch, M., Heuer, M., Heideck, G., and Styczynski, Z. A., "Energy Management of Vehicle Electrical System with Auxiliary Power Unit," presented at 2009 IEEE Vehicle Power and Propulsion Conference, USA, September 7-10, 2009, doi: [10.1109/vppc.2009.5289826](https://doi.org/10.1109/vppc.2009.5289826).
2. Simoes, M. G., Blunier, B., and Miraoui, A., "Fuzzy-Based Energy Management Control: Design of a Battery Auxiliary Power Unit for Remote Applications," *IEEE Industry Applications Magazine* 20(4):41-49, 2014, doi: [10.1109/mias.2013.2288375](https://doi.org/10.1109/mias.2013.2288375).
3. Farjah, A., Bagheri, E., Seifi, A. R., and Ghanbari, T., "Main and Auxiliary Parts of Battery Storage, Aimed to Fast Charging of Electrical Vehicles," presented at 2018 9th Annual Power Electronics, Drives Systems and Technologies Conference (PEDSTC), Iran, February 13-15, 2018, doi: [10.1109/pedstc.2018.8343809](https://doi.org/10.1109/pedstc.2018.8343809).
4. Berzi, L., Delichristov, D., Favilli, T., Pierini, M. et al., "Smart Energy Management of Auxiliary Load for Electric Vehicles," presented at 2020 IEEE International Conference on Environment and Electrical Engineering and 2020 IEEE Industrial and Commercial Power Systems Europe (EEEIC/I&CPS Europe), Spain, June 9-12, 2020, doi: [10.1109/eeeic/icpseurope49358.2020.9160762](https://doi.org/10.1109/eeeic/icpseurope49358.2020.9160762).
5. Yuhimenko, V., Baimel, D., Sitbon, M., Averbukh, M., et al., "Hybrid Internal Combustion Engine Based Auxiliary Power Unit," *Micromachines* 11(4):438, 2020, doi: [10.3390/mi11040438](https://doi.org/10.3390/mi11040438).
6. Dellermann, M., Gehring, M., and Zirn, O., "Optimal Control of a Multi Voltage Powernet with Electrified Auxiliaries in Hybrid-Electric Trucks," presented at 2020 IEEE International Conference on Environment and Electrical Engineering and 2020 IEEE Industrial and Commercial Power Systems Europe (EEEIC/I&CPS Europe), Spain, June 9-12, 2020, doi: [10.1109/eeeic/icpseurope49358.2020.9160600](https://doi.org/10.1109/eeeic/icpseurope49358.2020.9160600).
7. Cui, W. H., Wang J. S., and Chen, Y. Y., "Equivalent Circuit Model of Lead-acid Battery in Energy Storage Power Station and Its State-of-Charge Estimation Based on Extended Kalman Filtering Method," *Engineering Letters* 26(4):504-517, 2018.
8. Dadam, S., Jentz, R., Lenzen, T., and Meissner, H., "Diagnostic Evaluation of Exhaust Gas Recirculation (EGR) System on Gasoline Electric Hybrid Vehicle," *SAE Technical Papers* 2020-01-0902 (2020), <https://doi.org/10.4271/2020-01-0902>.
9. Dadam, S., Ravi, V., Jentz, R., Kumar, V. et al., "Assessment of Exhaust Actuator Control at Low Ambient Temperature Conditions," *SAE Technical Paper* 2021-01-0681 (2021), <https://doi.org/10.4271/2021-01-0681>.

## Contact Information

Contact details for the main author should be included here. Details may include mailing address, email address, and/or telephone number (whichever is deemed appropriate).

## Definitions/Abbreviations

|      |                                     |
|------|-------------------------------------|
| APU  | auxiliary power units               |
| ABMS | auxiliary battery management system |

|             |                                           |            |                 |
|-------------|-------------------------------------------|------------|-----------------|
| <b>BCM</b>  | body control module                       | <b>SOC</b> | state of charge |
| <b>ECU</b>  | electronic control unit                   |            |                 |
| <b>EGHR</b> | exhaust gas heat recovery                 |            |                 |
| <b>EPA</b>  | Environmental protection agency           |            |                 |
| <b>EVAP</b> | evaporative emission control system       |            |                 |
| <b>DC</b>   | direct current                            |            |                 |
| <b>GPF</b>  | gas particulate filter                    |            |                 |
| <b>HV</b>   | high voltage                              |            |                 |
| <b>HVAC</b> | heating, ventilation and air conditioning |            |                 |
| <b>LV</b>   | low voltage                               |            |                 |
| <b>OBD</b>  | on-board diagnostics                      |            |                 |
| <b>PCM</b>  | powertrain control module                 |            |                 |